


Mono-axial source excitation in vibrational tests

LDS ELECTRODYNAMIC SHAKER

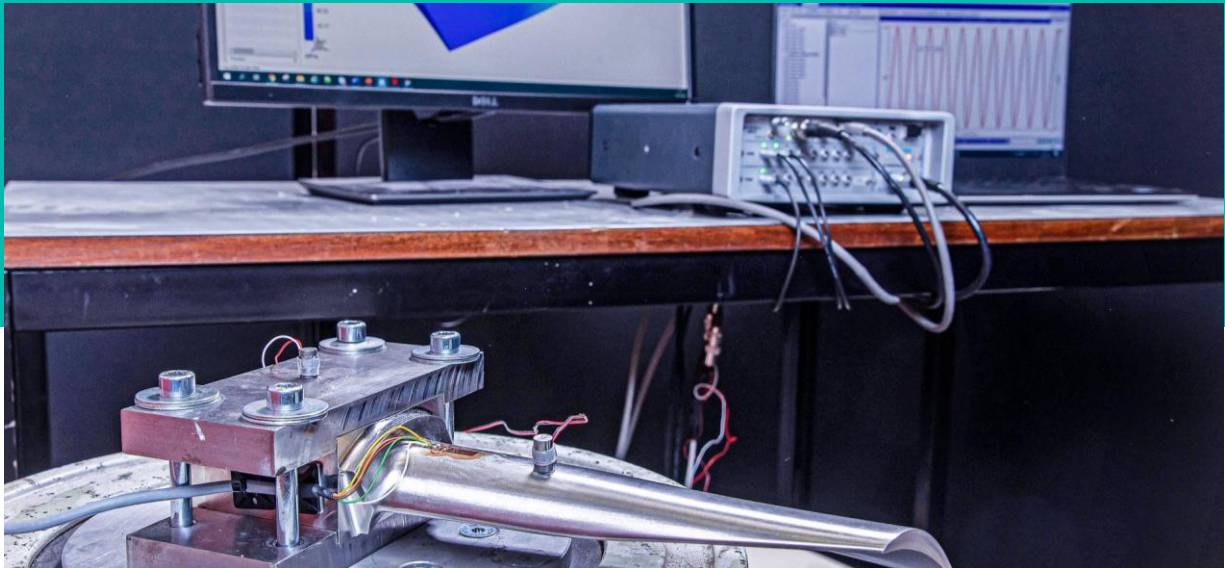

TECHNICAL SPECIFICATIONS

Frequency range	5 - 4000 Hz
Output force (upper limit)	2200 N peak
Rated travel (sine, upper limit)	25.4 mm peak to peak
Acceleration (sine, upper limit)	100 g peak
Payload (upper limit)	20.21 kg
Top table diameter	210 mm

